
Technical Specifications

New Manyard Edge

Description:

The Manyard edge has integrated shock absorber, integrated fall indicator and a new tubular design in green and black.

The Manyard edge has been tested on edge .

References:

1017916(CS20+Scaff hook)

1017918(2xCS20)

Features:

Webbing:

Raw material: Polyester

Width: 60 mm

Breaking strength: > 3000 daN

CS20 Karabiner:

Raw material: steel (1017918)/aluminium(1017916)

Opening: 18mm

Breaking strength: >2200 daN

Scaff hook:

Raw material: Aluminum

Opening: 63mm

Breaking strength: >2000 daN

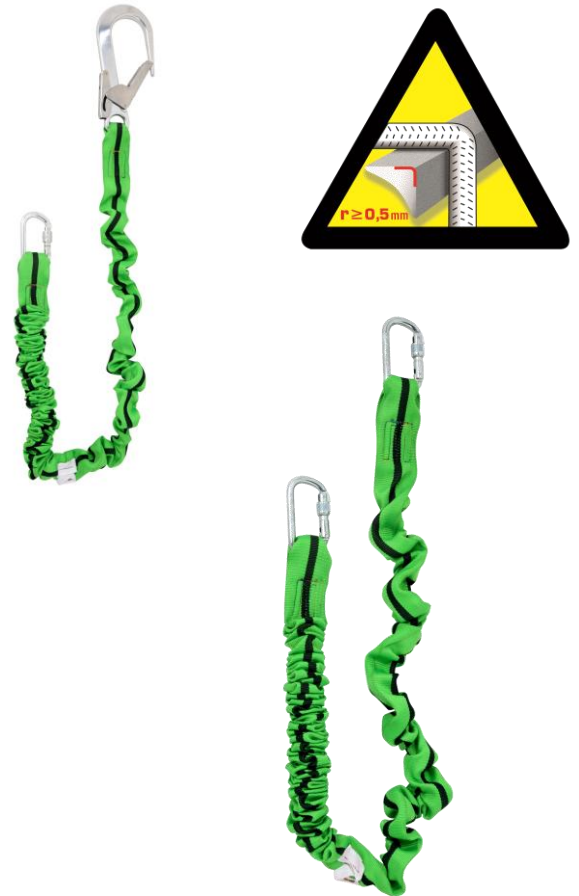
Weight :

1017916:1.206kg

1017918:1.040kg

Breaking strength: >2500 daN

EN355:2002 & PR EN 354:2006

**LAW of 19 MARCH 93**

PPE are products classified in category III, mortal risks, and as such they have to be the object of a periodic inspection for less than twelve months at the time of its use by the qualified person.

For more information, please contact our technical team at 02 48 52 40 42 or by e-mail techniserv.hsp@honeywell.com

HONEYWELL FALL PROTECTION FRANCE SAS

35-37 rue de la Bidauderie

F - 18100 Vierzon - France

Tel : +33 2 48 52 40 40

Fax : +33 2 48 71 04 97

Web site : www.honeywellsafety.com